GENERAL NOTES:

1. ALL WORK PERFORMED SHALL BE IN COMPLIANCE WITH ALL APPLICABLE CODES AND REQUIREMENTS OF FEDERAL, STATE AND LOCAL GOVERNING AGENCIES HAVING JURISDICTION.
2. THE OWNER RESERVES THE RIGHT TO DESIGNATE THE ORDER IN WHICH THE CONTRACTOR SHALL PROCEED WITH ANY AND ALL PORTIONS OF THE WORK. WORK SHALL BE COORDINATED SO AS NOT TO INTERFERE WITH THE BUILDING OCCUPANTS AND ACTIVITIES. PRIOR TO BEGINNING WORK, THE CONTRACTOR SHALL SUBMIT A CONSTRUCTION SCHEDULE SHOWING HOW THE WORK WILL PROCEED DURING THE CONSTRUCTION PERIOD. THE CONSTRUCTION SCHEDULE SHALL INCLUDE ANY WORK REQUIRED TO BE PHASED. THIS SHALL BE SUBMITTED FOR REVIEW AND APPROVAL BY THE OWNER AND THE OWNER'S REPRESENTATIVE.
3. THE CONTRACTOR AND THEIR TRADE SUBCONTRACTORS SHALL BE RESPONSIBLE FOR VISITING THE SITE AND FAMILIARIZING THEMSELVES WITH ALL EXISTING CONDITIONS PRIOR TO SUBMITTING THEIR BID.
4. THE CONTRACTOR SHALL COORDINATE ALL STAGING AREAS WITH THE OWNER'S REPRESENTATIVE PRIOR TO STARTING WORK.
5. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF ALL WORK UNDER THIS CONTRACT TO ENSURE THE QUALITY AND TIMELY COMPLETION OF THE WORK / PROJECT. THE CONTRACTOR SHALL COORDINATE ALL AREAS OF WORK WITH OTHER TRADES INVOLVED WITH THE PROJECT.
6. GENERAL CONTRACTOR WILL OBTAIN ALL PERMITS AND ARRANGE FOR PAYMENT OF PERMIT AND FILING FEES WITH OWNER.
7. THE CONTRACTOR SHALL PROPERLY PROTECT AND MAKE SAFE ADJACENT PROPERTY AS REQUIRED BY JOB CONDITIONS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO ISOLATE ALL WORK AREAS AND CLEARLY DEFINE PATHS OF ACCESS TO THE WORK FOR THE WORKMEN IN ORDER TO INSURE MINIMIZATION OF DUST INFILTRATION TO OTHER AREAS OF THE BUILDING AND TO PREVENT DAMAGE TO FLOORS, WALLS AND CEILINGS OF PUBLIC AND/OR FREIGHT ACCESS AREAS. IF SUCH DAMAGE SHOULD OCCUR, CONTRACTOR SHALL CORRECT THE DAMAGE IMMEDIATELY AT THEIR OWN COST.
8. THE CONTRACTOR SHALL PROVIDE NOT LESS THAN ONE ORDINARY HAZARD FIRE EXTINGUISHER AT EACH STAIRWAY ON ALL FLOOR LEVELS WHERE COMBUSTIBLE MATERIALS HAVE ACCUMULATED.
9. ALL PRECAUTIONS SHALL BE TAKEN TO PREVENT DIRT, NOISE, WATER AND DUST FROM ENTERING OTHER PARTS OF THE BUILDING DURING THE PROGRESS OF THE WORK.
10. EACH TRADE SUBCONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING THE WORK SITE FREE FROM DEBRIS AND ACCUMULATED REFUSE, EACH TRADE SUBCONTRACTOR SHALL HAVE SOLE RESPONSIBILITY FOR PROTECTING ALL AREAS FROM ENTRY BY UNAUTHORIZED PARTIES. SITE WILL BE LEFT BROOM CLEAN AT THE END OF EACH WORK DAY.
11. THE CONTRACTOR SHALL MAINTAIN FREE AND UNOBSTRUCTED ACCESS FROM WORK AREA AND ADJACENT SPACES TO THE OUTSIDE OF THE BUILDING AT ALL TIMES. IF THE PATHS OF EGRESS CANNOT BE MAINTAINED DURING CONSTRUCTION, THEN THE CONTRACTOR SHALL PROVIDE ALTERNATE MEANS OF EGRESS INCLUDING ERECTING BARRICADES, TEMPORARY SIGNS, ALTERNATE PATHS OF TRAVEL, ETC. IN ORDER TO MAINTAIN A SAFE WORK ENVIRONMENT FOR THE BUILDING OCCUPANTS AND VISITORS.
12. THE CONTRACTOR SHALL PROVIDE PROTECTION AT SIDEWALKS AND CURBS AROUND THE PREMISES SO THAT SAME MAY BE SAFELY USED BY THE PUBLIC AT ALL TIMES AND AS REQUIRED BY CODE AND ALL AGENCIES HAVING JURISDICTION.
13. THE CONTRACTOR SHALL PROVIDE BARRICADES AROUND WORK AREAS AS REQUIRED TO PREVENT BUILDING EMPLOYEES AND OTHER UNAUTHORIZED PERSONS FROM ENTERING THEREIN.
14. THE CONTRACTOR SHALL PROVIDE GUARDS, RAILS, BARRICADES, FENCES, SIDEWALK SHEDS, CATCH PLATFORMS, DECKING, NIGHT LIGHTING, AS REQUIRED BY CODE AND ALL AGENCIES HAVING JURISDICTION, AND AS REQUIRED TO PROVIDE ADEQUATE PROTECTION.
15. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK DURING CONSTRUCTION AGAINST DAMAGE, BREAKAGE, COLLAPSE, DISTORTIONS, AND OFF ALIGNMENTS ACCORDING TO CODE AND STANDARDS OF GOOD CONSTRUCTION PRACTICE.
16. DRAWINGS SHALL NOT BE SCALED. USE DIMENSIONS ONLY. ALL DIMENSIONS AND CONDITIONS SHOWN AND ASSUMED ON THE DRAWINGS MUST BE VERIFIED AT THE SITE BY THE CONTRACTOR BEFORE ORDERING ANY MATERIAL OR START OF ANY WORK. WHERE DISCREPANCIES OCCUR AND/OR WHERE THERE ARE CONFLICTS OR OMISSIONS IN THE DRAWINGS, SPECIFICATIONS AND APPLICATIONS, CONTRACTOR SHALL NOTIFY THE OWNER'S REPRESENTATIVE IMMEDIATELY AND REFRAIN FROM STARTING AND COMPLETING SUCH WORK, OR DEPENDENT WORK, UNTIL DIRECTED BY THE OWNER'S REPRESENTATIVE TO PROCEED. NO CHANGE IN DRAWINGS OR SPECIFICATIONS IS PERMISSIBLE WITHOUT THE WRITTEN CONSENT OF THE OWNER'S REPRESENTATIVE. U.O.N. ALL DIMENSIONS ARE GIVEN TO THE FINISHED FACE OF THE STUD PARTITION OR MASONRY WALL. CLEAR AND MINIMUM DIMENSIONS ARE GIVEN TO FACE OF WALL OR FLOOR FINISHES.

GENERAL NOTES: (CONTINUED)

17. DETAILS NOT SHOWN OR SPECIFIED HERE, BUT NECESSARY FOR PROPER AND ACCEPTABLE CONSTRUCTION, INSTALLATION OR OPERATION FOR ANY PART OF THE WORK SHALL BE INCLUDED IN THE WORK THE SAME AS IF HEREIN SPECIFIED OR INDICATED.
18. GENERAL CONTRACTOR SHALL PROVIDE AT LEAST ONE COPY OF EACH "T" SERIES DRAWING, "L" SERIES DRAWING AND EACH DISCIPLINE'S "D" SERIES DRAWING TO THEIR SUBCONTRACTORS.
19. SUBCONTRACTORS SHALL SEE TITLE SHEETS (T), LOW VOLTAGE COORDINATION SHEETS (L) AND EACH DISCIPLINE'S DEMOLITION SHEETS (D) FOR ADDITIONAL INFORMATION.
20. SUBCONTRACTORS ARE RESPONSIBLE FOR OBTAINING FROM THE GENERAL CONTRACTOR ALL DRAWINGS AND SPECIFICATIONS PERTINENT TO THEIR SCOPE OF WORK TO PROPERLY BID AND CONSTRUCT THIS PROJECT.
21. SUBCONTRACTORS ARE RESPONSIBLE FOR REVIEWING ALL DRAWINGS FOR THIS PROJECT. A COMPLETE LIST OF DRAWINGS CAN BE FOUND ON SHEET T00.
22. THE INFORMATION SHOWN ON THE CONTRACT DRAWINGS IS BASED ON LIMITED EXISTING CONDITION BUILDING DRAWINGS, LIMITED FIELD SURVEY AND LIMITED VISUAL OBSERVATION. EACH TRADE SUBCONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND EXISTING STRUCTURE/BUILDING INFORMATION IN FIELD PRIOR TO START OF THE CONTRACT WORK.
23. REFER TO SPECIFICATIONS FOR ADDITIONAL INFORMATION.
24. IF ANY HAZARDOUS MATERIALS ARE ENCOUNTERED, THE CONTRACTOR SHALL STOP WORK AND SHALL NOTIFY THE OWNER'S REPRESENTATIVE IMMEDIATELY.
25. THE CONTRACTOR SHALL PERFORM ALL CUTTING AND PATCHING REQUIRED TO COMPLETE THE WORK OR TO MAKE ITS PARTS FIT TOGETHER PROPERLY WITHOUT COMPROMISING THE QUALITY OF THE WORK. MATERIALS USED FOR PATCHING & REPAIRING SHALL MATCH EXISTING MATERIALS, UNLESS NOTED OTHERWISE.
26. ALL EXISTING AND NEWLY CONSTRUCTED SURFACES SHALL BE PROTECTED FROM DEMOLITION/CONSTRUCTION ACTIVITIES. WHERE EXISTING FINISHES ARE CUT OR ALTERED, THEY SHALL BE MODIFIED IN SUCH A MANNER THAT AFTER ASSEMBLY THEY PROVIDE A COMPLETE CONTINUOUS FINISHED CONDITION.
27. IN GENERAL, NEW MATERIALS USED FOR REPAIR CONDITIONS SHALL MATCH SIMILAR ITEMS IN QUALITY, DETAIL, PROFILE AND FINISH AS THOSE ALREADY BUILT INTO THE WORK, UNLESS OTHERWISE NOTED.
28. THE CONTRACTOR SHALL LAY OUT THEIR OWN WORK AND SHALL COORDINATE WITH AND VERIFY ALL DIMENSIONS REQUIRED BY OTHER TRADE SUBCONTRACTORS.
29. ALL WORK SHALL BE INSTALLED SO THAT ALL PARTS REQUIRED ARE READILY ACCESSIBLE FOR INSPECTION, OPERATION, MAINTENANCE AND REPAIR.
30. THE WORDS "PROVIDE" OR "PROVIDE NEW" SHALL MEAN TO SUPPLY AND INSTALL NEW ITEM(S) AND/OR SYSTEM(S) AS INDICATED.
31. THE TERM "FINISH FLOOR" SHALL MEAN THE NORMAL FINISHED SURFACE OF THE FLOOR LEVEL.
32. THE CONTRACTOR SHALL PATCH AND REPAIR ALL SURFACES DUE TO, BUT NOT LIMITED TO, THE DEMOLITION. ALL PENETRATIONS SHALL BE SEALED, CAPPED AND LEVELED SMOOTH TO MATCH ADJACENT MATERIALS, UNLESS OTHERWISE NOTED.
33. WHERE MANUFACTURER'S NAMES AND PRODUCT NUMBERS ARE INDICATED ON THE DRAWINGS IT SHALL BE CONSTRUED TO MEAN THE ESTABLISHING OF QUALITY AND PERFORMANCE STANDARDS OF SUCH ITEMS. ALL PRODUCT SUBSTITUTIONS SHALL BE SUBMITTED TO THE OWNER'S REPRESENTATIVE WITH A DEDUCT CHANGE ORDER FOR APPROVAL.
34. ALL PLUMBING, ELECTRICAL AND OTHER TRADE CONTRACT WORK REQUIRING THE USE OF LICENSED PERSONNEL SHALL BE PERFORMED BY LICENSED CONTRACTORS.
35. ALL INTERIOR WOOD BLOCKING SHALL BE CONSTRUCTED WITH FIRE RETARDANT TREATED AND PRESERVATIVE TREATED WOOD, UNLESS OTHERWISE NOTED.
36. ALL EXTERIOR WOOD BLOCKING AND NAILERS SHALL BE FIRE RETARDANT TREATED AND PRESERVATIVE TREATED WOOD, UNLESS OTHERWISE NOTED.
37. THE CONTRACTOR SHALL PROVIDE SLEEVES AND FIRE SEALANT AROUND ALL NEW, THROUGH WALL PENETRATIONS IN FIRE RATED WALLS. SEE MECHANICAL, ELECTRICAL, FIRE PROTECTION AND PLUMBING DRAWINGS. SEAL ALL PENETRATIONS THROUGH FIRE RATED WALLS WITH UL APPROVED FIRE RATED SYSTEMS.

GENERAL NOTES: (CONTINUED)

38. WHERE CONTRACTOR'S WORK REQUIRES ROOF OPENINGS, THE CONTRACTOR SHALL MAINTAIN THE ROOF OF THE BUILDING IN A WATERTIGHT CONDITION THROUGHOUT THE COURSE OF THE PROJECT. AT THE END OF EACH DAY'S OPERATION THE CONTRACTOR SHALL INSPECT CURRENT CONDITIONS TO ASSURE THAT NO WATER DAMAGE WILL RESULT FROM THEIR WORK. THE CONTRACTOR SHALL BE RESPONSIBLE TO PERFORM ALL ROOF WORK IN ACCORDANCE WITH ROOFING MANUFACTURERS INSTALLATION GUIDELINES TO ENSURE OWNER'S ROOFING WARRANTY REMAINS VALID AND IS NOT VOIDED OR COMPROMISED. SEE NOTE #48.
39. WHERE CONTRACTOR'S WORK REQUIRES ROOF PENETRATIONS, THE CONTRACTOR AND THEIR ROOFING TRADE SUBCONTRACTOR SHALL INSTALL A TEMPORARY WATER STOP BETWEEN NEW AND EXISTING ROOFING AREAS AT THE END OF EACH DAYS WORK. ALL DAMAGES RESULTING FROM THE WORK SHALL BE REPAIRED AND PAID FOR BY THE CONTRACTOR. SEE NOTE #48.
40. THE LOCATION AND SIZE OF ALL ROOF EQUIPMENT AND APPURTENANCES WHERE SHOWN ON THE DRAWINGS ARE APPROXIMATE AND SHALL BE VERIFIED BY THE CONTRACTOR IN THE FIELD.
41. WHERE EXISTING CABLES OR CONDUITS ON ROOF AND OTHER APPURTENANCES AFFECT THE WORK, SAME SHALL BE RELOCATED, ALTERED, OR OTHERWISE MODIFIED AS REQUIRED TO COORDINATE WITH NEW ROOFING SYSTEM.
42. WHERE NEW BASE FLASHING IS REQUIRED AT EXISTING CURB MOUNTED EQUIPMENT, THE EXISTING CURB MOUNTED EQUIPMENT SHALL BE TEMPORARILY DISCONNECTED, REMOVED AND REINSTALLED TO FACILITATE THE PROPER INSTALLATION OF NEW BASE FLASHINGS (UNLESS OTHERWISE INDICATED ON THE DWGS.). CONTRACTOR SHALL COORDINATE ALL SHUTDOWNS OF POWERED EQUIPMENT WITH THE OWNER'S REPRESENTATIVE. CONTRACTOR SHALL VERIFY PROPER OPERATION OF EQUIPMENT AFTER REINSTALLATION.
43. NEW REGLETS AND COUNTER FLASHINGS, WHERE INDICATED OR REQUIRED, SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. USE PREFABRICATED MITERED AND SEALED CORNER UNITS SUPPLIED BY REGLET MANUFACTURER.
44. IF EXTERIOR WINDOWS ARE REMOVED, THEN THE WINDOW TRADE SUBCONTRACTOR SHALL ONLY REMOVE THE AMOUNT OF WINDOWS AS CAN BE REPLACED IN THAT SAME DAY.
45. CONTRACTOR SHALL FIELD EXAMINE ALL EXISTING BUILDING UTILITIES, WHICH ARE SHOWN ON DRAWINGS TO BE REUSED, SUCH AS PIPING, DUCTWORK, FLUE PIPES, ELECTRICAL CONNECTIONS, ETC. FOR CODE COMPLIANCE. CONTRACTOR SHALL REPAIR, REPLACE, OR PROVIDE NEW COMPONENTS AT ANY DAMAGED OR MISSING CODE REQUIRED COMPONENTS, INCLUDING BUT NOT LIMITED TO PIPE/DUCT SUPPORTS, FIRE DAMPERS, PIPING/DUCTWORK INSULATION, ETC. CONTRACTOR SHALL NOTIFY THE OWNER'S REPRESENTATIVE IMMEDIATELY OF ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK.
46. IF THE CONTRACTOR VIOLATES OR IS NON-COMPLIANT WITH ANY CODES, LAWS, ORDINANCES OR REGULATIONS IN PERFORMING THE WORK, THEN THE CONTRACTOR SHALL, AT THEIR OWN EXPENSE, BEAR ALL PENALTIES AND COSTS AND SHALL INDEMNIFY AND HOLD HARMLESS THE OWNER AND EI ASSOCIATES AGAINST ANY CLAIMS, DEMANDS, SUITS, DAMAGES, COSTS AND EXPENSES THAT MAY RESULT FROM SUCH VIOLATIONS.
47. EIA SHALL NOT BE RESPONSIBLE FOR AND SHALL NOT HAVE CONTROL OR CHARGE OF CONSTRUCTION MEANS, METHODS, TECHNIQUES, SEQUENCES OR PROCEDURES OR FOR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK. EIA SHALL NOT BE RESPONSIBLE FOR CONTRACTOR'S FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH THESE DESIGN DOCUMENTS OR FOR THE CONTRACTOR'S FAILURE TO PROVIDE SERVICES IN A PROFESSIONAL MANNER IN ACCORDANCE WITH STANDARDS OF GOOD PRACTICE. EIA SHALL NOT BE RESPONSIBLE FOR OR HAVE CHARGE OVER THE ACTS AND/OR OMISSIONS OF THE CONTRACTORS, SUBCONTRACTORS OR ANY OF THEIR AGENTS OR EMPLOYEES OR ANY PERSON PERFORMING THE WORK.
48. WHERE CONTRACTOR'S WORK REQUIRES DISTURBING OF THE EXISTING ROOF THE CONTRACTOR SHALL, PRIOR TO BEGINNING ANY WORK, CONFIRM WITH THE OWNER'S REPRESENTATIVE IF THE EXISTING ROOF IS UNDER MANUFACTURER WARRANTY. SEE CONTRACTOR NOTES ON T01.
   A) IF THE EXISTING ROOF SYSTEM IS PRESENTLY UNDER A MANUFACTURER'S WARRANTY, THEN ALL WORK SHALL BE PERFORMED BY AN INSTALLER CERTIFIED BY THE EXISTING ROOFING MANUFACTURER. ANY MODIFICATIONS TO THE EXISTING ROOFING SYSTEM SHALL BE PERFORMED AS PER THE ROOFING MANUFACTURER'S REQUIREMENTS AND MUST MEET THE NECESSARY MANUFACTURER'S CRITERIA IN ORDER TO MAINTAIN THE PRESENT WARRANTY. CONTRACTOR SHALL PROVIDE ALL PROVISIONS NECESSARY FOR THE PROTECTION OF EXISTING EXPOSED SURFACES FROM PERIODS OF RAINFALL TO AVOID DAMAGE TO EXISTING STRUCTURE AND EXISTING/NEW ROOFING SURFACES IF RAINFALL SHALL OCCUR.
   B) IF THE EXISTING ROOF IS NOT UNDER MANUFACTURER'S WARRANTY, THEN ALL NEW ROOF WORK, INCLUDING ALL NEW ROOF PENETRATIONS, CURBS, ROOF MOUNTED EQUIPMENT, WALKING PADS AND CRICKETS, MUST BE PERFORMED TO PROTECT AND LIMIT DAMAGE TO THE EXISTING STRUCTURE AND ROOF. CONTRACTOR SHALL MAKE PROVISIONS (PROTECTION OF EXISTING EXPOSED SURFACES) FOR PERIODS OF RAINFALL DURING THE ROOFTOP INSTALLATION TO AVOID DAMAGES TO EXISTING STRUCTURE AND ROOFING SURFACES IF RAINFALL SHALL OCCUR.

BARRIER FREE SIGNAGE SCHEDULE

GENERAL:
LOCATIONS: ACCESSIBILITY SIGNAGE SHALL BE PROVIDED WHERE EVER REQUIRED BY CODE.

INTERIOR SIGNS: LOCATE ALONG SIDE OF THE DOOR ON THE LATCH SIDE AND SHALL BE MOUNTED 60 INCHES ABOVE FINISHED FLOOR TO THE CENTERLINE.

EXTERIOR SIGNS: LOCATE AT ENTRANCES AND WALKS TO DIRECT PEOPLE TO ACCESSIBLE ROUTES AND ENTRANCES. WALL MOUNT SIGNS SHALL BE MOUNTED 60" ABOVE FINISHED WALK LEVEL TO CENTER LINE OF SIGN.

TYPICAL DESIGNATION FOR BARRIER FREE SIGNAGE LOCATION.



BARRIER FREE DOOR CLEARANCES

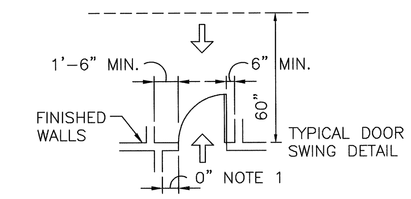

NOTE 1: 12" WHERE BOTH CLOSER AND LATCH ARE PROVIDED

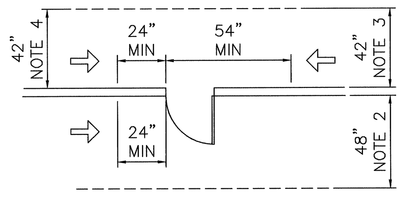

NOTE 2: 54" WHERE CLOSER IS PROVIDED
NOTE 3: 48" WHERE BOTH CLOSER AND LATCH ARE PROVIDED
NOTE 4: 48" WHERE CLOSER IS PROVIDED



NOTE 5: CLEARANCE @ DOOR LEVER MUST BE 42" MIN. WHERE HALL WIDTH IS < 60" BUT GREATER THAN 54". APPROACH DOES NOT MEET CLEARANCE REQUIREMENT IF HALL IS < THAN 54".

BARRIER FREE TURNING SPACES & SYMBOLS

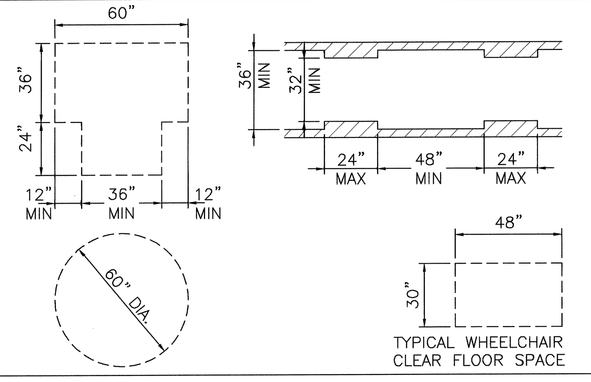

TYPICAL WHEELCHAIR CLEAR FLOOR SPACE

REFERENCE SYMBOL LEGEND

- EXISTING COLUMN GRID/COLUMN DESIGNATIONS
- NEW COLUMN GRID/COLUMN DESIGNATIONS
- ROOM NAME AND ROOM NUMBER DESIGNATIONS (MECH. ROOM 120)
- DOOR NUMBER DESIGNATION – SEE DOOR AND FRAME SCHEDULES FOR DETAILS (101)
- EXISTING PARTITION OR ITEM TO BE REMOVED
- EXISTING INTERIOR/EXTERIOR PARTITION OR ITEM TO BE REMAIN
- NEW PARTITION
- PARTITION TYPE DESIGNATION (X)
- TOILET ACCESSORY DESIGNATION (X)
- GLAZING/LOUVER DESIGNATION (X EX.)
  W = WINDOW ST = STORE FRONT
  V = VISION PANEL C = CURTAIN WALL
  EX = EXISTING L = LOUVER
- DATUM EL. (+0'-0") ELEVATION OF FINISH FLOOR DESIGNATION
- 1 / A30 DETAIL DESIGNATION
- A / A40 SECTION DESIGNATION
- A / A40 EXTERIOR ELEVATION DESIGNATION
- A B C / A00 INTERIOR ELEVATION DESIGNATION (A00 INDICATES DRAWING NUMBER)
- RIGHT OF WAY LINE (PROPERTY LINE)
- [X] KEYED NOTE DESIGNATION
- [DX] KEYED DEMOLITION NOTE DESIGNATION

DOOR SYMBOL LEGEND

- (101) NEW DOOR & FRAME
- EXISTING DOOR & FRAME TO REMAIN
- EXISTING DOOR & FRAME TO BE REMOVED
- (R 101) EXISTING DOOR TO BE RELOCATED
- (R 101) RELOCATED EXISTING DOOR

GLAZING SYMBOL LEGEND

- EXISTING GLAZING AND FRAME TO REMAIN
- EXISTING GLAZING & FRAME TO BE REMOVED

NJDOE STATE PROJECT NO.: 4130-050-19-4000

REV	REVISION DESCRIPTION	BY	DATE
0	ISSUED FOR BID AND CONSTRUCTION	RPS	4 NOV 19

EI ARCHITECTURE ENGINEERING PLANNING
EI Associates
ARCHITECTS & ENGINEERS, PA
8 RIDGEDALE AVENUE•CEDAR KNOLLS NJ 07927•973.775.7777

RICHARD F. BASTA, AIA — REGISTERED ARCHITECT LICENSE NO. NJ 10149 — ARCHITECTURE

SCALE	AS NOTED
DRAWN BY:	JMK 05/2019
DESIGNED BY:	JMK 05/2019
CHECKED BY:	
APPROVED BY:	
PROJECT MANAGER:	

PROJECT: PISCATAWAY HIGH SCHOOL
BLEACHERS, FIELD LIGHTING & STORAGE FACILITY REPLACEMENT
PISCATAWAY NEW JERSEY

TITLE: GENERAL NOTES, LEGENDS & ABBREVIATIONS

EIA DRAWING NO.: T02

CLIENT DWG. NO.: - - - - -

EIA PROJECT NO.: EG8531.01

(XX)

ABBREVIATIONS

A/C	AIR CONDITIONING	CLR. OPG.	CLEAR OPENING	ENCL.	ENCLOSURE	H.B.	HOSE BIBB	L.L.	LIVE LOAD	PH.	PHONE	S.D.	SOAP DISPENSER	T.O.S.	TOP OF SLAB OR TOP OF STEEL
ACOUS.	ACOUSTICAL	C.M.U.	CONCRETE MASONRY UNIT	ENGR.	ENGINEER(ING)	H.C.	HOLLOW CORE	L.P.	LOW POINT	PL.	PLATE	SCHED.	SCHEDULE	T.O.C.	TOP OF CONCRETE
A.D.	AREA DRAIN	CLOS.	CLOSET	ENTR.	ENTRANCE	H.P.	HIGH POINT	LTG.	LIGHTING	P.L.	PROPERTY LINE	SCL.	SELECTED	T.O.P.	TOP OF PAVEMENT
ADJ.	ADJUSTABLE	C.O.	CLEANOUT	EQ.	EQUAL	HD.	HEAD	LVR.	LOUVER(S)	PL. LAM.	PLASTIC LAMINATE	SECT.	SECTION	T.O.S.	TOP OF STEEL
A.F.F.	ABOVE FINISH FLOOR	COL.	COLUMN	EQUIP.	EQUIPMENT	HDWR.	HARDWARE	MAINT.	MAINTENANCE	PLYWD.	PLYWOOD	SHT.	SHEET	T.O.W.	TOP OF WALL
AGGR.	AGGREGATE	CONC.	CONCRETE	E.W.	EACH WAY	HDWD.	HARDWOOD	MATL.	MATERIAL	PR.	PAIR	SHWR.	SHOWER	T.P.H.	TOILET PAPER HOLDER
ALUM.	ALUMINUM	CONN.	CONNECT OR CONNECTION	E.W.C.	ELECTRIC WATER COOLER	HT.	HEIGHT	MAX.	MAXIMUM	PREFAB.	PREFABRICATED	SIM.	SIMILAR	TV	TELEVISION
ALT.	ALTERNATE	CONST.	CONSTRUCTION	EXIST.	EXISTING	H.M.	HOLLOW METAL	MECH.	MECHANICAL	PROJ.	PROJECT	SPEC.	SPECIFICATION(S)	TYP.	TYPICAL
A.P.	ACCESS PANEL	CONT.	CONTINUOUS	EXP. JT.	EXPANSION JOINT	HORIZ.	HORIZONTAL	MEZZ.	MEZZANINE	PROD.	PRODUCTION	SPKR.	SPEAKER	U.L.	UNDERWRITERS LABORATORY
APPROX.	APPROXIMATE	CONTR.	CONTRACTOR	EXT.	EXTERIOR	HTG.	HEATING	MFG.	MANUFACTURING	PROP.	PROPERTY	SQ.	SQUARE	UNFIN.	UNFINISH
ARCH.	ARCHITECT OR ARCHITECTURAL	CORR.	CORRIDOR	F.A.	FIRE ALARM	HVAC	HEATING, VENTILATING & AIR CONDITIONING	MFR.	MANUFACTURER	PSF	POUNDS PER SQUARE FOOT	sf OR ◻	SQUARE FEET	UTIL.	UTILITY
AUTO.	AUTOMATIC	CORRUG.	CORRUGATED	F.A.I.	FRESH AIR INTAKE			MGR.	MANAGER	PSI	POUND PER SQUARE INCH	S.S.	STAINLESS STEEL	UR.	URINAL
AVG.	AVERAGE	CPT.	CARPET	FD	FLOOR DRAIN	H.W.	HOT WATER	MH.	MANHOLE	PT.	POINT	STA.	STATION	U.O.N.	UNLESS OTHERWISE NOTED
BCT.	BABY CHANGING TABLE	DEMO.	DEMOLITION	FDN.	FOUNDATION	H.W.S.	HANDWASH SINK	MIN.	MINIMUM	P.T.	PRESSURE TREATED	S.T.C.	SOUND TRANSMISSION COEFFICIENT	V.B.	VAPOR BARRIER
BD.	BOARD	C.W.	COLD WATER	F.E.	FIRE EXTINGUISHER	I.D.	INSIDE DIAMETER	MISC.	MISCELLANEOUS	PTD.	PAINTED	STD.	STANDARD	V.B.C.	VINYL BASE COVED
BDRM.	BEDROOM	DEPT.	DEPARTMENT	F.FL.	FINISH FLOOR	I.F.	IN THE FIELD	M.O.	MASONRY OPENING	PVC	POLYVINYL CHLORIDE	STL.	STEEL	V.B.S.	VINYL BASE STRAIGHT
BF	BARRIER FREE	D.F.	DRINKING FOUNTAIN	FIN.	FINISH(ED)	IN.	INCH(ES)	MTD.	MOUNTED	Q.T.	QUARRY TILE	STOR.	STORAGE	V.C.T.	VINYL COMPOSITE TILE
BITUM.	BITUMINOUS	DIA. OR ø	DIAMETER	FIXT.	FIXTURE	INCL.	INCLUDE OR INCLUDING	MTL.	METAL	R.	RISER	STRUCT.	STRUCTURAL	VERT.	VERTICAL
BLDG.	BUILDING	DIAG.	DIAGONAL	FL.	FLOOR	INFO.	INFORMATION	MUL.	MULLION	R/A	RETURN AIR	SUSP.	SUSPEND(ED)	VEST.	VESTIBULE
BLK.	BLOCKING	DIM.	DIMENSION	FLUOR.	FLUORESCENT	INSUL.	INSULATION	N.I.C.	NOT IN CONTACT	RAD.	RADIUS	SV.	SERVICE SINK	V.I.F.	VERIFY IN FIELD
BM.	BEAM	DIV.	DIVISION	F.O.	FRAMED OPENING	INT.	INTERIOR	NO.	NUMBER	R.B.	RUBBER BASE	SYM.	SYMMETRICAL	VOL.	VOLUME
B.O.	BY OWNER	DN.	DOWN	FT.	FOOT OR FEET	INCAN.	INCANDESCENT	NOM.	NOMINAL	R.D.	ROOF DRAIN	SYS.	SYSTEM	V.WC.	VINYL WALLCOVERING
BOT.	BOTTOM	DR.	DOOR	FTG.	FOOTING	I.T.	INFORMATION TECHNOLOGY	N/A	NOT APPLICABLE	REBAR.	REINFORCING BAR	T.	TREAD	W/	WITH
BSMT.	BASEMENT	D.S.	DOWN SPOUT	FURN.	FURNITURE	JAN.	JANITOR	NS	NON-SPRINKLERED	REF.	REFERENCE	TAN.	TANGENT	W.C.	WATER CLOSET
[	CHANNEL	D.S.P.	DRY STANDPIPE	FURR.	FURRING	J.B.	JUNCTION BOX	N.T.S.	NOT TO SCALE	REFR.	REFRIGERATOR	T.B.	TOWEL BAR	WC.	WALLCOVERING
CAB.	CABINET	DWG.	DRAWING	FUT.	FUTURE	J.C.	JANITOR'S CLOSET	OA.	OVERALL	RFG.	ROOFING	T&B	TOP AND BOTTOM	WD.	WOOD
C.B.	CATCH BASIN	DWR.	DRAWER	F.WC.	FABRIC WALLCOVERING	JT.	JOINT	O.C.	ON CENTER	REINF.	REINFORCED OR REINFORCING	T.C.	TOP OF CURB	W.GL.	WIRE GLASS
CEM.	CEMENT	EA.	EACH	GA.	GAUGE, GAGE	K.O.	KNOCKOUT	O.D.	OUTSIDE DIAMETER	RESIL.	RESILIENT	T.D.	TRENCH DRAIN	W.H.	WATER HEATER
CHBD.	CHALKBOARD	E.D.	EQUIPMENT DRAIN	GALV.	GALVANIZED	L	ANGLE	OFF.	OFFICE	REQD.	REQUIRED	TECH.	TECHNICAL	WLD.	WELDED
C.J.	CONTROL JOINT	E.E.W.	EMERGENCY EYE WASH	G.B.	GRAB BAR	LAB.	LABORATORY	OPG.	OPENING	RM.	ROOM	TEL.	TELEPHONE	W/O	WITHOUT
℄	CENTER LINE	EL.	ELEVATION	G.C.	GENERAL CONTRACTOR	LAC.	LACQUER	OPP.	OPPOSITE	R.O.	ROUGH OPENING	TEMP.	TEMPERED	W.P.	WATERPROOF(ING)
C.T.	CERAMIC TILE	ELEC.	ELECTRICAL	GL.	GLASS OR GLAZED	LAM.	LAMINATE	OVHD.	OVERHEAD	REV.	REVISION	T&G	TONGUE AND GROOVE	WT.	WEIGHT
CLG.	CEILING	ELEV.	ELEVATOR	GND.	GROUND	LAV.	LAVATORY	OZ.	OUNCE	SAN.	SANITARY	THK.	THICK(NESS)	W.W.F.	WELDED WIRE FABRIC
		EMER.	EMERGENCY	GYP. BD.	GYPSUM BOARD			PART. BD.	PARTICLE BOARD	S.C.	SOLID CORE	THS.	THRESHOLD	YD.	YARD
				GWB	GYPSUM WALL BOARD			PC.	PRECAST						